
## **Macbond Arctic®**

### **Engineered Tapes & Laminates**







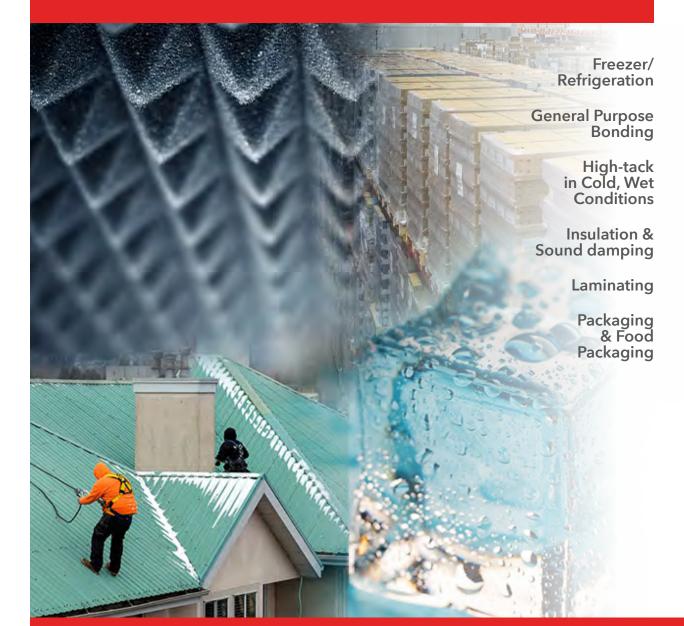







Macbond Arctic's unique adhesive formulation offers aggressive peel and tack at temperatures as low as -10F. Let Arctic extend your building season or most challenging cold temperature application today!







# **Macbond Arctic®**

## **Engineered Tapes & Laminates**


Minimum App Temperature -10° (-23°C)

Service Range: -65°F to 150°F (-54°C to 65.5°C)



#### **Double-Coated Tapes**

Construction								Master Roll		MSI	0	1 55	HDPE	Shear
Part Number	Carrier	Adhesive		Veight ils	Caliper Mils	Liner	End Use	Jth	gth	Weight / P	Stock/MTO	Pee	Peel	Sh
			Liner	Un- wind	Carrier & Adhesive		Release	Width	Length			Lbs/ in	Lbs/ in	Hours
ARTX1161	.5mil PET	Arctic MX10	1.5	1.5	3.5	72#	Medium	60"	750'	0.33	S	7.6	7.3	75+
ARTX1162	.5mil PET		2.0	2.0	4.5	White PCK	Medium	60"	750'	0.35	S	7.6	7.3	75+



#### **Transfer Adhesives**

Construction								Master Roll		<u></u> 2	SS 1	HDPE	Shear
Part Number	Carrier	Adhesive	Coat Weight Mils	Caliper Mils	Liner	End Use	Width	Length	Weight / MSI	Stock/MTO	Peel	Peel	Sh
				Liner & Adhesive		Release	Wie	Len	W	Sŧ	Lbs/ in	Lbs/ in	Hours
ARTX1062	NA	Arctic MX10	2.0	6.4	80# White SCK	Medium	60"	540'	0.33	S	6.2	6	75+

 $\textbf{For Regulatory Information}, please \ visit \ www.mactac.com for \ all \ product \ regulatory \ compliance. \\ \textbf{For Quality information}, \ please \ visit \ www.mactac.com/quality \ for \ all \ manufacturing \ site \ ISO \ 9001 \ certificates. \\ \end{aligned}$ 

For Technical Data Sheets please visit www.mactac.com/industrialtapes.



A LINTEC COMPANY

Customer Service 800-548-3456 | Inside Sales 800-328-2619

America I 4560 Darrow Boad Stow OH 44224 1898