


# ColorTrans™

TRANSPARENCY MOUNTING FILMS



ColorTrans delivers affordable Transparency Mounting that's Clearly Superior!

## Graphics that Rock!

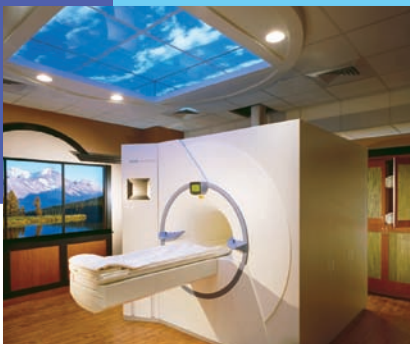

Backlit scenic displays enhance healthcare environments



Larger than life transparencies create awesome museum displays



Backlit panels are a feature of trade show displays

**NEW PERMACOLOR®** *Because your image is everything*



# ColorTrans™ New from PERMACOLOR® technology.

TRANSPARENCY MOUNTING FILMS

## New Intermediate Transparency Mounting Films Deliver a Premium Look at Lower Cost

### What you're looking for.

The all new optically clear adhesive films engineered with a polyester carrier double-coated with a clear acrylic adhesive, and two polyester release liners. Designed for face-mounting and back-mounting transparencies to Plexiglas® and other clear or translucent substrates.

### Why ColorTrans™ exceeds your expectations.

New ColorTrans provides unique laminate clarity and bond strength in an intermediate film. It invisibly bonds graphics to clear panels, provides UV protection, and smooth mounting with no image distortion. All this at a cost that gives you a new competitive advantage in short-term and mid-term applications.

- CT2100 provides optimum image integrity due to excellent adhesive wet-out and smooth PET liners
- Ideal for mounting transparencies such as Duratrans® or Ilfochrome® to Plexiglas® and other clear or translucent substrates
- With built-in UV protection, CT2100 is suitable for both indoor and outdoor applications
- Tough PET liners do not tear like paper – minimize waste
- Available in popular sizes: 41" x 150' and 51" x 150'

Product	Roll Size	Adhesive	Liner
CT2141	41" x 150'	Acrylic Permanent	Clear Polyester
CT2151	51" x 150'	Acrylic Permanent	Clear Polyester

#### Durability

- Indoor and three year outdoor durability.
- Use-life estimate based on accelerated age studies on vertical applications under "normal" environmental conditions.
- Severe environmental conditions will reduce use life.
- Recommendations are believed to be accurate but do not constitute a warranty written or implied. Refer to MACTac® Product Performance Guides and Technical Assistance Bulletins prior to use. Visit [www.MACTac.com](http://www.MACTac.com) to download.

#### Temperature Ranges

Minimum Application: 50° to 120°F (10° to 49°C)  
End Use: -20° to 200°F (-29° to 93°C)

#### Shelf Life

Two years when stored at 75°F (24°C) and 50% relative humidity in the original package.

ColorTrans™



INTERNATIONAL SIGN ASSOCIATION

SERIOUSLY COOL TECHNOLOGY



A Bemis Company