
Solutions that Stick

Wide-Format Media and Applications Guide







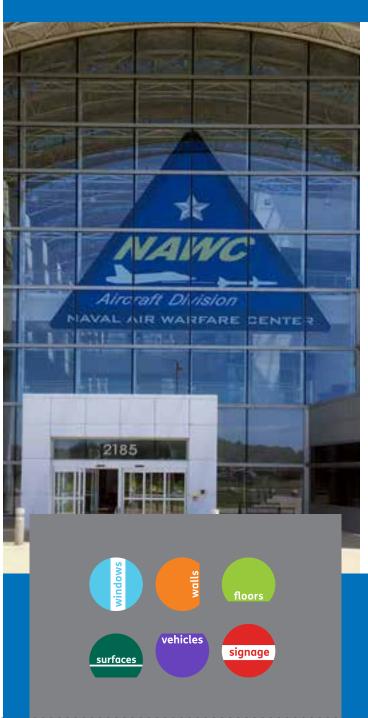

Windows, Walls, Floors and More!



Table of Contents

Category	Application	Product	Page
Windows	Window Graphics	b•free°	3
Walls	Rough Textured Walls	roughrap [®]	4
Floors	Concrete Sidewalks	streetrap	5
Walls	Walls	wallnoodle° permanoodle°	6
Walls	Walls	roodle	7
Walls, Signage	Low Surface Energy	rebel [°] h	8
Walls, Signage	Cold Temperature	rebelict	9
Signage	Economy Signage	print vinyl [®]	10-11
		printvinyl®scored	12
Walls, Decals	Graphics & Decals	roodlescored	13
Walls, Signage, Vehicles	Vehicle Wraps	gruv™	14-15
		colorgard°luv	16
Overlaminates	Overlaminates	rayzor™	17
Tools	Squeegees, Glove, Vinyl Cutter	mactac.	18

b-free®

Window Graphics

Features

B•free® Window Films are translucent frosted, dusted and clear 3.1 mil polymeric vinyls with clear acrylic omni-directional bubble-free adhesive on an 90# polycoated layflat liner for no mess printed window applications for interior or exterior decoration.

Benefits

B•free Window Films quickly gained notoriety for one simple reason it eliminated the necessity of wet application. With patented micro-structured bubble-free adhesive Mactac graphics can be applied dry with virtually no distortion of the printed graphic, saving time and money.

<u>Durability</u>

Five year outdoor durability, seven years indoors

<u>Printing</u>

Eco-Solvent, Solvent, Latex, UV Inkjet

Applications

Digitally printed window film applications for interior or exterior decoration, privacy or etched glass graphics

Tech Guide



Visit the Mactac NA channel on YouTube for a video demo on window graphic application.



Helpful Tips

B-Free Window Films are for printed and unprinted Glass. Use Felt Squeegees and light touch for installs.

Product Code		Face	Adhesive	Liner	Roll Size	Roll Weight#	Durability	ed!
JJ5796MBFv2	3.1	Matta Frantsal	Repositionable	00#150	54" x 75'	24	5-7	No Overlaminates Needed!
JX5796MBFv2	mi	Matte Frosted	Permanent	90# LFP	54" x 150'	47	years	ates
JJ5798MBFv2	3.1	Matta Duata d	Repositionable	90# LFP	54"x 75'	24	5-7	amin
<u>JX5798MBFv2</u>	mil	Matte Dusted	Permanent	90# LFP	54" x 150'	47	5-7 years	Overl
JJ5799MBFv2	3.1	Gloss Clear	Repositionable	00#150	54"x 75'	24	5-7	No
JX5999MBFv2	mil		Permanent	90# LFP	54" x 150'	47	years	

LFP - Layflat polycoated

Rough Textured Walls





Roughrap requires a dry application surface, and must be heated thoroughly to 220°F minimum to ensure a perfect installation.

For optimal installation and removal use one of our Rayzor overlaminates.

Features

Roughrap® is a 2.0 mil soft white gloss cast vinyl. It is highly conformable to provide a paint-like effect when applied to textured brick and concrete walls. The high-tack permanent adhesive is engineered with a low profile to leave no adhesive behind, but provide an ultimate bond until ready to be removed. Pair with Rayzor™ overlaminate for the thinnest construction available for exterior decoration.

Benefits

Roughrap has the industry's longest warranty for rough textured wall graphics at eighteen months and the industry's preferred matte laminate, Rayzor matte, for interior graphics where a professional no glare look is preferred.

Durability

18 month durability for exterior brick and concrete walls, five years indoors

Printing

Eco-Solvent, Solvent, Screen, Latex

Applications

Brick walls for corporate, retail, sports venues, community events, schools, and conventions

Tech Guide

TA2102 Guide for installing Roughrap

TA2032 Guide for Surface Preparation Visit the Mactac NA channel on YouTube for a video demo on rough wall graphic application.

Product Code	Face	Adhesive	Liner	Roll Size	Durability	Rough Walls	Rayzor Matte or Gloss Overlaminates
RR100W54L75 RR100W54L150	2.0 Gloss White Cast	High-tack Permanent	90# LFP	54" x 75' 54" x 100'	1.5 years	•	

LFP - Layflat polycoated

streetrap®

Concrete Sidewalks

Features

Streetrap® STR328 is a 4.0 mil opaque matte white vinyl with an aggressive, thick layer of high-tack adhesive for applications that are hard to stick to, like unsealed pedestrian concrete or asphalt sidewalks or smooth to slightly textured walls. Streetrap comes with the industry's favorite Mactac 90# SuperFlat™ liner which makes it ideal as a multi-print media for all wide-format hardware.

Benefits

Streetrap is the leading industry product for concrete sidewalks applications paired with Colorgard® Floor PF6600 overlaminate for wet and dry applications. It has been used successfully for major events in North America such as marathons, festivals, and sporting events.

It is also an ideal choice for many high-tack applications like low surface energy plastic, vending, kiosk powder-coated paints, and cement walls. Use Colorgard LUV for overlaminate for walls and other applications.

Durability

Three months up to one year durability for floors when paired with PF6600 and five years on vertical surfaces

Printing

Eco-Solvent, Solvent, UV Inkjet, UV Gel, Screen, Latex

Applications

Untreated concrete for retail, tradeshows, sports venues, community events, conventions

Tech Guide



TA2040 Guide for installing Floor Graphics, including Streetrap



Helpful Tips

Streetrap is removable on unsealed sidewalks and walls, but is also an excellent option where high-tack permanent applications are desired.

Colorgard Floor PF6600 is the only laminate certified by ANSI/NSFI for B101.3 & B101.1, high traction under wet conditions!

						Α	ppli	catio	ns	
Product Code	Face	Adhesive	Liner	Roll Size	Indoor/Outdoor Floor Durability	Indoor	Outdoor	POP	Unsealed Rough Concrete/Asphalt	Colorgard PF6600 Overlaminate
STR328L100	4.0 Matte White Opaque	Aggressive Permanent Opaque	90# LFP	54" x 100'	Up to 1 year			-	•	•

LFP - Layflat polycoated

Walls

wallnoodle[®] permanoodle[®]



Wallnoodle has a permanent counterpart, called Permanoodle. PN628 is perfect for barrier graphics and other signage projects where a thick, easy to apply product is requested.

Also, do not try to print edge to edge with Wallnoodle, unless you are using a latex printer. solvent printers will cause edge lifting on your graphic, due to the light tack of the Wallnoodle adhesive.

Features

Wallnoodle® is a 6.0 mil semi-rigid, matte white vinyl designed for repositionable and removable wall posters decals and stickers. It is recommended that you do not use a laminate with Wallnoodle. Supplied on a 90# SuperFlat™ liner, Wallnoodle is stable for all recommended printing processes.

Benefits

Customers specify **Wallnoodle** as a proven product for repositionable and removable wall posters. Mactac has mastered the balance between microsphere adhesive and release characteristics to ensure that you will never see tunneling off of your printer or during installation. Phthalates free and child safe.

Durability

Six months to one year of indoor durability

Printing

Eco-Solvent, Solvent, UV inkjet, UV gel, Screen, Latex

Applications

Short-term wall posters, decals, bumper stickers and interior hand applied direction signage and short-term POP signs

Tech Guide

TA2500 Guide for Drywall application instructions



Visit the Mactac NA channel on YouTube for a video demo on wall graphic application.

Recommended Overlaminates

Lamination is not recommended for Wallnoodle due to the weight of the total construction versus the light tack strength of the adhesive. As Wallnoodle is a short-term application, lamination should not be required .

							٧	Vall A	pplic	ation	IS		
Product Code	Face	Adhesive	Liner	Roll Size	Durability	Posters	Indoor Signage	Outdoor Signage	POP	Smooth Surface	Tiled Murals	Wall Graphics	Colorgard LUV Overlaminates
WN628W54	6.0 Matte White	Ultra Removable,	00#150	54" x 100'	Indoor	П	П			Ħ		П	No
WN628W60	mil Vinyl	Repositionable	90# LFP	60" x 100'	Only					Ы			laminates
PN628W54L100	6.0 Permanoodle	Permanent	90# LFP	54" x 100'	Indoor Only								

LFP - Layflat polycoated



Features

Roodle® is a 6.0 mil semi-rigid, matte white vinyl designed for tileable wall graphics, decals, bumper stickers and general purpose interior decoration. Roodle is semi-rigid, so it is perfect for easy application and can be applied laminated or without lamination. Supplied on a 90# SuperFlat™ polycoated liner, Roodle is stable for all recommended printing processes.

Benefits

Roodle has a thick 6.0 mil semi-rigid face stock which makes it very easy to install. It is cleanly removable for up to two years, and meets all requirements for flame spread and smoke density specifications for ANSI/NFPA - Class A and IBC-Class A. Phthalates free and child safe.

Durability

Four year outdoor durability, five years indoors

Printing

Eco-Solvent, Solvent, UV inkjet, UV gel, Screen, Latex

Applications

For use with all intermediate edge to edge wall murals and other easy to apply removable applications, like elevator doors

Tech Guide

TA2500 Guide for Drywall application instructions



Visit the Mactac NA channel on YouTube for a video demo on wall graphic application.



Helpful Tips

Choose Roodle for all of your removable wall mural needs when a strong, cleanly removable adhesive is required. As painted drywall can be a tricky substrate to stick to, please always ask for a paint specification, check it against the technical assistance guide and test first.

							٧	/all A	pplic	ation	ıs		
Product Code	Face	Adhesive	Liner	Roll Size	Durability	Posters	Indoor Signage	Outdoor Signage	POP	Smooth Surface	Tiled Murals	Wall Graphics	Colorgard LUV Overlaminates
RO628W54L100 RO628W60L100	6.0 Matte White Vinyl	Aggressive Removable	90# LFP	54" x 100' 60" x 100'	4 years	П	Б	٥	٥		٥	٥	•

LFP - Layflat polycoated

Walls, Signage





The Mactac Rebel line is an entire family of products with a true strong removable and permanent option as well.

Rebel H sticks to low VOC paints too!

Features

Rebel®H is a high-performance 4.0 mil polymeric vinyl built to be the most versatile print media on the market. 100% opaque, matte white facestock provides complete block-out and cover up, and the clear, high-tack permanent adhesive ensures that when it absolutely, positively has to stick, it will. 90# SuperFlat™ liner for superior lay flat on a variety of hardware makes Rebel the most versatile for any operation. Also available in a very unique Gloss Clear version for OEM Decals.

Benefits

Rebel H is different by design. The opacity is built into the face stock so you have no gray adhesive to dull the film's white point. You get the opacity you need, without diluting the strength of the adhesive with gray filler. The adhesive is clear, and strong, and is proven to have more tack and peel than the competition. Wrap it up with Mactac SuperFlat 90# liner for a true multi-print media, and you have the one product that customers ask for when it absolutely has to stick.

Durability

Five year outdoor durability

Printing

Eco-Solvent, Solvent, Latex, Screen, UV Inkjet, UV gel

Applications

Board mounting to HDPE, primed MDO, Sintra, primed MDO for barricades, powder-coated paint, general signage applications and durable decals

Tech Guide



Visit the Mactac NA channel on YouTube for a video demo on wall graphic application.

							V	/all A	pplic	ation	ıs			
Product Code	Face	Adhesive	Liner	Roll Size	Durability	Posters	Indoor Signage	Outdoor Signage	POP	Smooth Surface	Tiled Murals	Wall Graphics	Colorgard LUV Overlaminates	Rayzor tm Overlaminates
RB528HW54L75				54" x 75'										
RB528HW54L150	4.0 Matte White	High-tack	90# LFP	54" x 150'	5 years									
RB528HW60L150				60" x 150'										
RB599HW54L150	4.0 Gloss Clear	High-tack	90# LFP	54" x 150'	5 years									

Low Surface Energy



Features

Enhancing the Rebel Print Media product line, Rebel Cold **Temp** features the latest in Mactac cold-temperature innovation. Rebel Cold Temp is a specially formulated high-tack pressuresensitive adhesive (PSA) designed for high performance in low-temperature applications. It allows customers to meet their marketing, advertising, and signage needs-even in cold weather.

Benefits

Rebel Cold Temp enables outdoor applications during winter months when low temperatures hinder the performance of standard adhesives. These products can be installed in temperatures as low as 15 degrees Fahrenheit and effectively function in sub-freezing conditions. The Rebel Cold Temp adhesive establishes a strong bond with various substrates, including the capacity to adhere to low-surface energy (LSE) materials. It sticks to powder-coated paints, low-VOC painted walls, polyethylene, polypropylene, and challenging surfaces.

Durability

Five years of outdoor durability

Printing

Eco-Solvent, Solvent, Latex, Screen, UV inkjet, UV gel

Tech Guide



Visit the Mactac NA channel on YouTube for a video demo on wall graphic application.



Helpful Tips

This adhesive facilitates installations in cold environments, such as cold storage applications like freezers and walk-in coolers, which are not feasible with most adhesivecoated materials.

							V	/all A	pplic	ation	ıs			
Product Code	Face	Adhesive	Liner	Roll Size	Durability	Posters	Indoor Signage	Outdoor Signage	POP	Smooth Surface	Tiled Murals	Wall Graphics	Colorgard LUV Overlaminates	Rayzor tm Overfaminates
RB528CTW54L150	3.2 Matte	Cold-Temp	00"155	54" x 150'	5	П	H		П	Ы	П			
RB528CTW60L150	mil White	High-tack	90# LFP	60" x 150'	years	Н	Н	Н	Н	Н	Ы	ы	ы	
RB599CTW54L150	3.0 Clear	Cold-Temp	0011150	54" x 150'	5	Ħ	Ħ		Ħ					
RB599CTW60L150	3.0 Clear High Gloss	Cold-Temp High-tack	90# LFP	60" x 150'	years									

Economy Signage



For an economy solution that needs to be removable or more opaque with a gray adhesive, try Printvinyl Gray removable or permanent. Which is also available in matte and gloss white finishes.

printvinyl[®] printvinyl[®] gray

Features

Printvinyl media is designed for short term indoor and outdoor applications on flat and slightly curved surfaces, including signage and POP for up to 4 years.

Printvinyl Gray Opaque media is designed for short term indoor and outdoor applications on flat and slightly curved surfaces, including signage and POP for three to five years.

Printvinyls are ideal for general purpose indoor and outdoor advertising and promotional projects where quality, durability and economy are the main factors.

Benefits

Printvinyl and Printvinyl Gray are rare finds for printers that are looking for a three to five year durable print media at an economy price that does not sacrifice quality. The products print exceptionally well, and the adhesive is strong, meaning that it will stick to substrates like stainless steel and aluminum, but also Sintra®, Gator® and many other surfaces.

Durability

Three to five year outdoor durability

Printing

Solvent, eco-solvent, latex, UV inkjet, and UV screen printing.

Applications

General purpose indoor and outdoor signage for flat or slightly curved surfaces

Economy Signage

								V	Vall A	pplic	ation	ıs			
Product Code		Face	Adhesive	Liner	Roll Size	Durability	Posters	Indoor Signage	Outdoor Signage	POP	Smooth Surface	Brick/Block Walls	Plotter Cut	Promogard Overlaminates	Colorgard LUV Overlaminates
Print Vinyl							1			ï					
PV328PW54L150 PV328PW60L150	3.2 mil	Matte White	Permanent	78# CCK	54" x 150' 60" x 150'	3 years									
PV328RW54L150 PV328RW60L150	3.2 mil	Matte White	Removable	78# CCK	54" x 150' 60" x 150'	3 years									
PV329PW54L150 PV329PW60L150	3.2 mil	Gloss White	Permanent	78# CCK	54" x 150' 60" x 150'	3 years									
PV529RW54L150	3.2 mil	Gloss White	Removable	90# LFP	54" x 150'	5 years									
Print Vinyl Gray	Y			Y						,					
PVG328PW54L150	3.2 mil	Matte White	Gray Permanent	78# CCK	54" x 150'	3 years									
PVG329PW54L150	3.2 mil	Gloss White	Gray Permanent	78# CCK	54" x 150'	3 years									
PVG329RW54L150	3.2 mil	Gloss White	Gray Removable	78# CCK	54" x 150'	3 years									
PVG528PW54L150	3.5 mil	Matte White	Gray Permanent	90# LFP	54" x 150'	5 years									
PVG528HTW54L150	3.2 mil	Matte White	Gray High Tack	90# LFP	54"x150'	5 years	•								
PVG529PW54L150	3.5 mil	Gloss White	Gray Permanent	90# LFP	54" x 150'	5 years									

LFP - Layflat polycoated

CCK- Clay coated kraft

Graphics & Decals

printvinyl®scored



Helpful Tips

Easy-to-remove liner helps with the hinge method during installation. The installer can remove one strip of the scored liner or a whole section at a time.

Features

PrintvinyI™ Scored, the first of its kind for the wide format graphics industry. The products feature a scored liner for screen and wide format printers. Our Prinvinyl film is recognized for its proven quality and consistent printability.

Scores 1.25" apart to allow maximum flexibility for the end user to bend and break, exposing the edge of the liner for hassle-free removability. Branding or additional text can be printed on the liner for ease of use.

Durability

Five years

Printing

Eco-Solvent, Solvent, UV Inkjet, Screen, Latex

Applications

Decals, product identification, promotional labels, bumper stickers, game pieces, POP displays, window and wall graphics

Tech Guide

Visit the Mactac website for more information and Performance Guides, www.mactac.com/printvinylscored.



Visit the Mactac NA channel on YouTube for a video demo on wall graphic application.

		Viny							W	/all N	⁄ledi	a			
Product Code		Face	Adhesive	Liner	Roll Size	Durability	Posters	Indoor Signage	Outdoor Signage	POP	Smooth Surface	Decals	Wall Graphics	Plotter Cut	Promogard Overlaminates
PVS528URW54L150	3.2	Matte White	Liltura Danasanah la	78# CCK	54" x 150'	5	Ħ	Ħ	П	Ħ	П	П		П	
PVS528URW60L150	mil	Vinyl	Oltra-Removable	Scored	60" x 150'	years									
PVS528PW54L150	3.2	Matte White	D	78# CCK	54" x 150'	5	Ħ	Ħ	П	Ħ	П	П		П	
PVS528PW60L150	mil	Vinyl	Permanent	Scored	60" x 150'	years									

CCK - Clay Coated Kraft

Graphics & Decals

roodlescored

Features

The original Roodle® (RO628) is a top-selling Mactac product ideal for murals, signage, and decals. The new Roodle Scored shares similar characteristics but features a slightly modified product construction. Roodle Scored utilizes the same aggressive removable adhesive found in Roodle but uses a 5.5 mil matte white calendared PVC and a 78# kraft scored liner 2.5" apart, allowing for seamless, hassle-free liner removal.

Benefits

A marginally thinner 5.5 mil film with the scored liner allows for a competitive price point. . The back score is spaced 2.5 inches apart and helps when removing it. It can also be a great feature during installation, allowing a seamless application.

Durability

Four years of outdoor durability with up to 2 years of clean removability

Printing

Eco-Solvent, Solvent, Latex, Screen, UV inkjet, UV gel Liner can be printed with Latex, Screen, UV inkjet, UV gel

Applications


Decals, product identification, promotional labels, bumper stickers, game pieces, POP displays, window and wall graphics

Tech Guide

Visit the Mactac website for more information and Performance Guides, www.mactac.com/printvinylscored.



Visit the Mactac NA channel on YouTube for a video demo on wall graphic application.

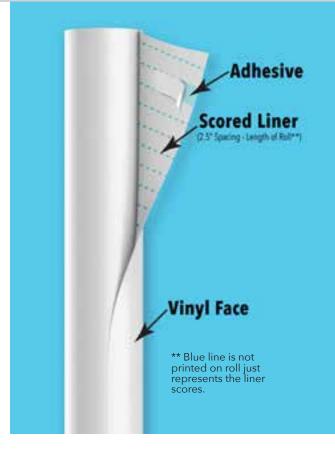

								vvai	I Me	ala			
Product Code	Face	Adhesive	Liner	Roll Size	Durability	Posters	Indoor Signage	Outdoor Signage*	POP	Smooth Surface	Tiled Murals	Wall Graphics	Colorgard LUV Overlaminated
ROS528W54L150	5.5 Matte White Vinyl	Aggressive Removable	78# Scored Liner	54" x 150'	4 years								•

CCK - Clay Coated Kraft

Vehicles & Signage

Get into the gruv™





Gruv 4 & 5

Elevate your signage strategy with the **Gruv 4 & Gruv 5 series**. Crafted with air-egress vinyl media, it guarantees easy installations for captivating wall and signage applications. This is the product you need for wall and signage decals that endure the test of time.

Gruv 7

Featuring a cost effective, high-quality cast film, **Gruv 7** (GV729) is highly durable, easy to apply, available in permanent and removable adhesive options, and ideal for a wide variety of graphic applications, including windows, walls, floors, signage, and vehicles...

Gruv Slideable

Designed for speed and ease of application, the new product features a highly conformable 2.0 mil gloss white cast vinyl. The film is coated on one side with a low initial tack and permanent gray block-out acrylic adhesive that is slideable and repositionable. A primer is used to enhance the adhesive anchorage to the film for clean removability. It offers superior performance on complex curves, recesses, and riveted surfaces. The repositionable adhesive is accompanied by a 90# polycoated micro-channel, air-egress slideable liner. The micro-channels imparted into the adhesive allow a bubble-free installation without showing through the film.

Printing

All Gruv products can be printed with Eco-Solvent, Solvent, Latex, Screen, UV inkjet, UV gel

Applications

Full and partial vehicle wraps, Outdoor signage

Tech Guide

TA2501 Guide for application

Vehicles & Signage

							Sign	age		Veh	icles		000	> v	v
Product Code	,	Face	Adhesive	Liner	Roll Size	Durability	Short & Medium Term	Long Term	Partial Wrap	Full Wrap	Flat and simple Curves	complex curves Rivets	Promogard® PG7000 Overlaminate	Colorgard® LUV Overlaminates	Rayzor Overlaminates
GV428PW54L150	3.2 mil	Matte White Opaque	Permanent	90# Air-egress	54" x 150'	4 years									
GV429PW54L150	3.2 mil	Gloss White Opaque	Permanent	90# Air-egress	54" x 150'	4 years									
GV429RW54L150	3.2 mil	Gloss White Opaque	Removable	90# Air-egress	54" x 150'	4 years									
<u>GV528PW54L150</u>	3.0	Matte	Damasa	90#	54" x 150'	(5)	П							M	
GV528PW60L150	mil	White Opaque	Permanent	Air-egress	60" x 150'	years									
<u>GV529PW54L150</u>	3.0	Gloss White	Permanent	90#	54" x 150'	5 years	П							П	
GV529PW60L150	mil	Opaque	i emianem	Air-egress	60" x 150'	years									
GV529RW54L150	3.0	Gloss White	Removable	90#	54" x 150'	5	Н							П	
GV529PW60L150	mil	Opaque	Removable	Air-egress	60" x 150'	5 years									
<u>GV729RW54L150</u>	2.0	Gloss	Gray	90#	54" x 150'	7		П	Н						H
GV729RW60L150	mil	White	Removable	Air-egress	60" x 150'	7 years									
GV729PW54L150	2.0	Gloss	Gray	90#	54" x 150'	7		Ħ	П						H
GV729PW60L150	mil	White	Permanent	Air-egress	60" x 150'	7 years									
GV1029SW54L150	2.0	Gloss	Gray	Micro	54" x 150'	10			П						
GV1029W60L150	mil	White	Repositionable	Channel Air-egress	60" x 150'	10 years		Ц	Ы						H





Overlaminate

colorgardeluv



Helpful Tips

Colorgard LUV has some very impressive technical benefits, including the lowest Delta E, or color shift, amongst the leading competitors. This means when you laminate with Colorgard LUV, your image stays as intended, it does not vary. Now you know why we call it Colorgard!

Features

Customers prefer Colorgard® LUV as their quality intermediate overlaminate. The Colorgard laminate range is a 3.2 mil blended polymeric calendared vinyl that includes inhibitors that protect it from UV light. The permanent acrylic adhesive is specially designed for UV inks and is recommended for all digitally printed medias, whether for indoor or outdoor application, up to four years.

Benefits

Colorgard adhesive is a proprietary Mactac formulation that was developed specifically for UV inks. The softness and viscosity of the adhesive allows it to flow into the channels that UV ink creates, and provides an impressive lamination with virtually no silvering right off of the laminator. Combined with exceptional adhesive anchorage, there is no other need for a premium intermediate laminate for quality print image protection.

<u>Durability</u>

Five to seven year outdoor durability

Printing

Designed for use with all print formats, including UV inks

Applications

For use with all intermediate image protection needs, up to four year durability

Tech Guide

TA2044 Guide for Cold Lamination Procedures

Product Code	Face	Adhesive	Liner	Roll Size	Outdoor Durability
LUV8054W54L150	3.0 Gloss	D	E0# W//2	54" x 150'	5
LUV8060W60L150	3.0 Gloss	Permanent	58# WK	60" x 150'	years
LUV8254W54L150	3.0 Matte		FOUNT	54" x 150'	5
LUV8260W60L150	Matte mil	Permanent	58# WK	60" x 150'	years
LUV8354W54L150	3.0 Luctor	Permanent	58# WK	54" x 150'	5 years
LUV8360W60L150	mil Luster			60" x 150'	

WK - White Kraft





Features

1.5 mil cast Matte and Gloss overlaminating films designed for full and partial vehicle wraps and other high-performance applications. This laminate enhances the image and protects against UV light exposure, moisture, dirt and abrasion and offers a durability of up to 5 years in exterior applications.

Durability

Five to seven year outdoor durability

Printing

Designed for use with all print formats, including UV inks

Applications

For use with full or partial vehicles wraps rivets and complex curves and outdoor signage.

Tech Guide

TA2044 Guide for Cold Lamination Procedures



Product Code	Fac	e	Adhesive	Liner	Roll Size	Outdoor Durability
<u>LF3648</u>	1.5 Ontically C	de a Class	Democrat	1.0 ··· I DET	54" x 150'	5
<u>LF3649</u>	mil Optically C	Optically Clear Gloss	Permanent	1.2 mil PET	60" x 150'	5 years
<u>LF3648GL75</u>					54" x 75'	
<u>LF3648G</u>	1.5 Clear Gloss	5	Permanent	50# Glassine	54" x 150'	5 years
<u>LF3649G</u>					60" x 150'	
<u>LF3638GL75</u>					54" x 75'	
<u>LF3638G</u>	1.5 Matte		Permanent	50# Glassine	54" x 150'	5 years
<u>LF3639G</u>					60" x 150'	

Application Tools



Mactac HD Wrap Installation Gloves IC1975 (M), IC1976 (L)

HD Wrap Installation gloves that stretch and conform to make your hand the ultimate installation tool. Made with High-Density fabric, the glove glides over the film's surface, allow the pressure from you hands to apply the graphic effectively. It can be used for vehicle wraps, walls, and windows using a dry application. Gloves are cut-resistant and made of 100% recycled materials.

Enclosed Flexible Media Cutter - IC1972

The Flexible Media Cutter is an easy and safe tool for wideformat media. It is ideal for large and small jobs, making it the perfect companion for your next installation. This flexible media cutter easily and safely cuts wide-format materials around printers, laminators, tables, or application surfaces without using an open blade to prevent accidental cuts or damage. It's a valuable addition to any tool pouch or workshop. 100 per box

Replacement Blades for Media Cutter - IC1974 Pack of 10

Soft Felt Squeegee - IC1970

Felt squeegees are recommended for applications requiring a conformable edge, such as window and wall graphics or other graphics applications where scratching is a concern. 100 per box

Hard Plastic Squeegee with Felt Buffer - IC1969

Enhance the graphic application process using a Mactac squeegee with felt buffer to help prevent scratches and damage to the image. Using the non-buffered side when more pressure is needed. The Mactac Squeegee can be used to install car wraps, window graphics, wall graphics, Floor graphics, decals, or many other applications! 100 per box

Replacement Felt Buffers for Plastic Squeegee IC1973
Pack of 10


Service and Innovation - The Strength of Mactac® *Mactac offers:*



Dedicated local sales professionals with knowledge in the Mactac product



Expertise in application-based products, in the field



Proven market expertise in wide-format graphics



Personalized
Customer Care
Managers,
knowledge and



Dedicated customer service professionals



Over 1,200 ICC profiles on our website, for perfect printing



Open-Image WarrantySM system with your workflow in mind OUR TEAM, YOUR TEAM 1959

Over 60 Years of adhesive manufacturing excellence

