

TT9502PB Thermal Transfer Translabel®

Revised 12/2017 KSM

Product Description:

A thermal transfer facestock in a piggyback construction used when a transferable label is required. ST95 permanent adhesive is used on both face and middle liner. Both the middle and bottom ply are 2.4 semi-bleached super calendared kraft

Face Description:

A premium bright white, coated facestock designed for high-speed thermal transfer printing. This smooth, smudge resistant face offers great thermal transfer printing and flexo printing.

Physical Properties Without Adhesive		
Test Property	Typical Values	Test Method
Tear, grams	40 MD 50 CD	TAPPI T-414
Tensile, lbs./in.	28 MD 17 CD	TAPPI T-494
Brightness %	83	TAPPI T-452
Stiffness	170 MD 100 CD	TAPPI T-543
Opacity, %	87	TAPPI T-425
Caliper, inches	0.0029 +/- 10%	TAPPI T-411
Basis Weight, lbs. (25" x 38"/500)	48 +/- 10%	TAPPI T-410

Adhesive Description ST-95

ST95 is a permanent acrylic emulsion with aggressive initial tack, excellent ultimate adhesion and mandrel hold. Very good adhesion to corrugated, glass, and various plastic substrates. Considered to be latex glove friendly for use in some healthcare applications.

Physical Properties of Adhesive		
Test Property	Typical Values	Test Method
Thickness	0.0007 +/- 10%	
Peel Adhesion, lbs./in.	1.9 or paper tear	PSTC-101F (30 min. applied)
Minimum Application Temperature	+25°F (-4°C)	CTM #45 Curwood Polyester Film Dry Surface
Service Ranges	-75°F to +200°F (-59°C to 93°C)	CTM #45 Curwood Polyester Film Dry Surface

Regulatory Information

This product complies with CONEG regulations. All Mactac Roll Label Products meet the requirements of the Clean Air Act of 1990.

Liner Description:

Both the middle and bottom liner are a semi-bleached super calendared kraft liner excellent for die cutting, stripping and label dispensing. Primarily for roll -to -roll applications.

Physical Properties of Liner		
Test Property	Typical Values	Test Method
Caliper, inches	0.0024 +/- 10%	TAPPI T-411
Basis Weight, lbs. (24" x 36"/500 sheets)	40 +/- 10%	TAPPI T-410


Shelf Life:

Unconverted Product - one year when stored at 72°F and 50% R.H

APPLICATIONS AND USES

Office label and forms, direct mailers, lottery/ sweepstakes mailings, medical records, inventory labels, shipping labels, novelty constructions and pharmaceutical applications requiring a thermal transfer piggyback construction.

* NOTE: Thermal transfer printing quality and bar code scannability are dependent upon the interworking of several elements; the ribbon, the print head and the facestock. Please test all applications. Consult MACTac's Technical Marketing Department for guidelines regarding printer and ribbon compatibility.

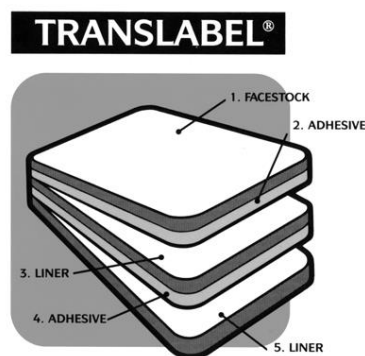

Please Note:

The user is responsible for determining the product's suitability for all aspects of the applications.

If there are questions about applications, or regulatory compliances, please contact your Mactac sales representative to discuss your requirements for recommendations.

If this is a printed Performance Guide, it is an uncontrolled document. Please check the Mactac website for the latest, most up-to-date version at www.mactac.com

IMPORTANT NOTICE: The information given, and the recommendations made herein are based on our research and are believed to be accurate, but no guarantee of their accuracy or completeness is made. In every case, user shall determine before using any product in full scale production, or in any way, whether such product is suitable for user's intended use for their particular purpose under their own operating conditions. User assumes all risk and liability whatsoever in connection with their use of any product. The products discussed herein are sold without any warranty as to merchantability or fitness for a particular purpose, or any other warranty, express or implied. No representative of ours has any authority to waive or change the foregoing provisions, and no statement or recommendation not contained herein shall have any force of effect unless in an agreement signed by the officers of seller and manufacturer. Nothing contained herein shall be construed to imply the nonexistence of any relevant patents or to constitute a permission, inducement or recommendation to practice any invention covered by any patent without authority from the owner of the patent. The following is made in lieu of all warranties, express or implied: Seller's and manufacturer's only obligation shall be to replace or credit such quantity of the product proved to be defective at its discretion.

TM Trademark of Morgan Adhesives Company.

® Registered Trademark of Morgan Adhesives Company.

