

PERMAHOLD™

Mounting & Bonding Tapes

2020 | Product June | Graphic Tapes

The PERMAHOLD™ mounting line of adhesive tapes has been created to support today's graphic and sign industry.



mactac 
A LINTEC COMPANY

macmount®

White Foam Tape

IM1763 & IM1863

Applications

General Mounting | ADA Signage | Architectural Letters

POP Promotional | Displays | Interior Signage

Wall Signage



General Mounting



ADA Signage



Architectural Letters



POP Promotional



Displays



Interior Signage



Wall Signage



Application Surfaces

- Mounting to Flexible PVC
- Acrylic Board
- Sintra Board
- Styrene
- Dibond
- LSE Plastics
- Powder Coated Surfaces
- Low VOC Painted Surfaces

Benefits

- MacMount Ultra 555 permanent adhesive
- Performs well on a variety of surfaces including many difficult substrates such as LSE substrates and Low VOC paints



White Foam Tape

IM1763 & IM1863


Mactac's Ultra 555 rubber adhesive is formulated for superior holding power and creep resistance for today's challenging indoor wall mounting applications. The foam carrier allows for conformability and compressibility in irregular surfaces. The product is designed for mounting applications that require high adhesion and superior shear strength.

Application Temperature +50°F
Service Temperature 0°F to 190°F

				Roll Dimensions		Liner
	Part Number	Carrier	Coat Weight	Width	Length	
White Foam Tapes	IM1763L216	1/32" Foam	2.6 mil	1"	216'	78# Kraft
	IM1763W5L216	1/32" Foam	2.6 mil	0.5"	216'	78# Kraft
	IM1863L108	1/16" Foam	2.6 mil	1"	108'	78# Kraft
	IM1863W5L108	1/16" Foam	2.6 mil	0.5"	108'	78# Kraft

MacMount Foam Tapes Meet the following criteria:

- REACH and RoHS regulations
- CPSIA

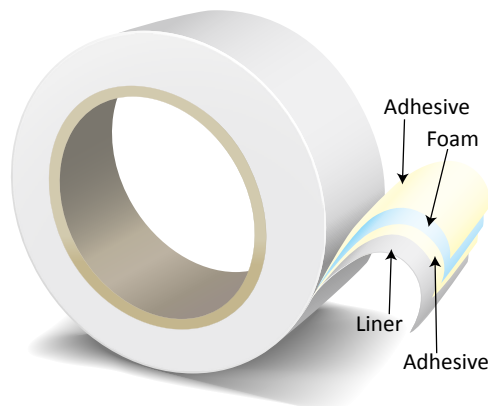

macbond®

Double-Coated Film

Clear IB4132 & Opaque IB4432

Applications

General Mounting | Architectural Letters

POP Promotional | Displays | Interior Signage

Wall Signage



General Mounting



Architectural Letters



POP Promotional



Displays



Interior Signage



Wall Signage



Application Surfaces

- Mounting to Flexible PVC
- Acrylic Board
- Sintra Board
- Styrene
- Dibond
- LSE Plastics
- Powder Coated Surfaces
- Low VOC Painted Surfaces

Benefits

- MacBond HTA410 solvent-free permanent adhesive is pH neutral and will not yellow over time.
- The adhesive has a high initial tack and adheres to a wide variety materials

macbond®

Double-Coated Film

Clear IB4132 & Opaque IB4432

Double Coated film products feature a solvent-free acrylic adhesive that is pH-neutral to avoid yellowing and offers added firmness for ease in handling, die-cutting, and finishing. This product is designed for general purpose applications that require high initial tack to a wide variety of substrates. These double-coated tapes provides excellent conformability to rough or uneven surfaces and are ideal for indoor or outdoor fixture, sign, and panel applications, including nameplate and face mounting applications. The IB4432 opaque film is an excellent backer in place of a white UV flood coat on CYMK prints.


Application Temperature +50°F

Service Temperature -40°F to 250°F

Double Coated Film - Permanent/Permanent (clear version)					
Part Number	Carrier	Coat Weight	Roll Dimensions		Liner
			Width	Length	
IB4132W54L150	0.5 mil Clear PET	2.4 mil	54"	150'	72# Poly Coated
IB4132W54L400	0.5 mil Clear PET	2.4 mil	54"	400'	72# Poly Coated
Double Coated Film – HTA410 Permanent/Permanent (opaque version)					
IB4432W54L150	2.6 mil Opaque PP	2.4 mil	54"	150'	72# Poly Coated
IB4432W54L400	2.6 mil Opaque PP	2.4 mil	54"	400'	72# Poly Coated

MacBond Film Tapes Meet the following criteria:

- REACH and RoHS regulations
- CPSIA
- Conflict Minerals

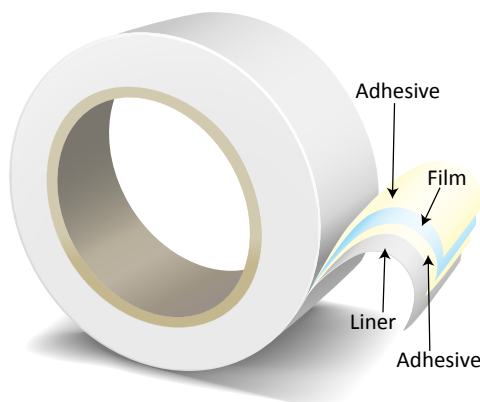

macbond®

Acrylic High-tack Transfer Tape

IF4042 & IF4044

Applications

ADA Signage | Architectural Letters

POP Promotional Displays | Interior Signage

Wall Clear Signage



ADA Signage



Architectural Letters



POP Promotional



Displays



Interior Signage



Wall Clear Signage



Application Surfaces

- Mounting to Flexible PVC
- Acrylic Board
- Sintra Board
- Styrene
- Dibond
- LSE Plastics
- Powder Coated Surfaces
- Low VOC Painted Surfaces
- Felt & Fabric

Benefits

- MacBond MP440 Solvent-free acrylic permanent adhesive is pH neutral and will not yellow over time
- Excellent conformability for rough or uneven surfaces for mounting fixtures, signs and panels



Acrylic High-tack Transfer Tape

IF4042 & IF4044

Transfer tape products feature a solvent-free acrylic adhesive that is pH-neutral to avoid yellowing and offers added firmness for ease in handling, die-cutting, and finishing. This product provides a combination of high initial tack and cohesive strength. The Transfer tape delivers excellent conformability for rough or uneven surfaces and is ideal for indoor or outdoor fixture, sign and panel applications, including nameplate and face mounting applications

Application Temperature Above 50°F for best performance

Service Temperature -40°F to 250°F

Part Number	Coat Weight	Roll Dimensions		Liner
		Width	Length	
IF4042W12L180	2.0 mil	12"	180'	72# Poly Coated
IF4042W24L180	2.0 mil	24"	180'	72# Poly Coated
IF4044W12L180	4.0 mil	12"	180'	72# Poly Coated
IF4044W24L180	4.0 mil	24"	180'	72# Poly Coated

MacBond Transfer Tapes Meet the following criteria:

- REACH and RoHS regulations
- Consumer Product Safety Act of 2008
- FDA 21 CFR175.125 (a) and (b)
- Prop 65
- Toxics in Packaging (formerly CONEG)

