
macbond (8) laminating adhesives

Macbond transfer adhesives offer fabricators and converters the flexibility to build high-performance custom laminates on press. This product line offers a wide variety of adhesive and release liner options.

	Product Line	Constuction	Adhesive Description	Master Web Width	Lead Time
Acrylic Transfer Adhesives	IF3051W52	40# SCK / 1.0 mil GP310 acrylic /50# SCK	General Purpose Acrylic	53"	5 - 7 Days
	IF4042-72*	2.0 mils HSA440 / 72# PCK	High-Performance Acrylic	60"	5 - 7 Days
	IF4044-72*	4.0 mils HSA440 / 72# PCK	High-Performance Acrylic	60"	5 - 7 Days
	IF4032-72*	2.0 mils HTA410 / 72#PCK	High-Tack Acrylic	54"	5 - 7 Days
	IF4034-72*	4.0 mils HTA410 / 72# PCK	High-Tack Acrylic	54"	5 - 7 Days
	IF4072-72	2.0 mils LSE427 / 72# PCK	Low Surface Energy Acrylic	54"	5 - 7 Days
	IF4072-5072	50# SCK / 2.0 mils LSE427 / 72# PCK	Low Surface Energy Acrylic	54"	5 -7 Days
Rubber Transfer Adhesives	IF1023-80	2.6 mils FBR899 / 80#SCK	General Purpose Rubber	60"	5 - 7 Days
	IF1011-78	1.8 mils XT593 / 78#SCK	High-Performance Rubber	60"	5 - 7 Days
	IF1013-78	2.6 mils XT593 / 78#SCK	High-Performance Rubber	60"	5 - 7 Days
	ARTX1062	2.0 mils Arctic MX10 / 72# PCK	Cold-Temperature Rubber	60"	5 - 7 Days

Products with an (*) are also available with a second release liner. This sacrificial liner is an easy release clear 1.2 mil PET.



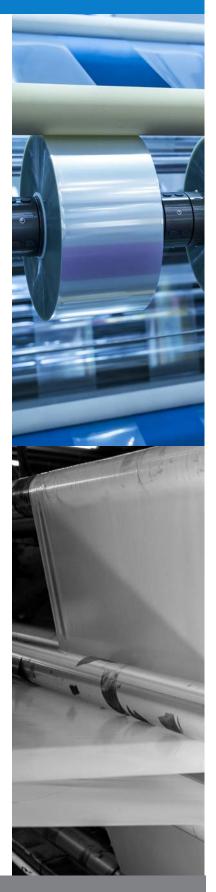

Service Program

- Lead Time: 5 7 Business DaysMOQ: one master web width
- Maximum OD: 30"
- Slitting Charge: No Charge for first 9 cuts
- Standard Samples: 6" x 50'
 Available for same/next day shipment
- Custom Samples are available to ship in 5 7 Days

Meets the following criteria:

- REACH and RoHS regulations
- Prop 65 Compliant
- Consumer Product Safety Improvement Act of 2008
- Conflict Minerals
- · Toxics in Packaging

For Performance Guides please visit www.mactac.com/industrialtapes.

Mactac is ISO9001:2015 certified.

Mactac is a member of the following organizations:
Gasket Fabricators Association
Pressure Sensitive Tape Council

